

# HART Temperature Head Transmitter TMT 192 Series



Universal head transmitter for resistance thermometers (RTD), thermocouples (TC), resistance and voltage transmitters, settable via HART-protocol, for installation in a sensor head (From B)

## Application areas

- ◆ Temperature head transmitter with HART- protocol for converting various input signals into a scalable 4 to 20 mA analogue output signal
- ◆ Input
  - Resistance thermometer (RTD)
  - Thermocouple (TC)
  - Resistance transmitter ( $\Omega$ )
  - Voltage transmitter (mV)

## Performance

- ◆ Universal settings with HART-protocol for various input signals
- ◆ 2 wire technology, 4 to 20mA analogue output
- ◆ High accuracy in total ambient temperature range galvanic isolation
- ◆ An internal temperature sensor for active temperature compensation(For T/C)
- ◆ Wide voltage supply range
- ◆ Expanded resistance input (max 2K $\Omega$ )
- ◆ Expanded voltage input (max 2K mV)

## Technical data

### Power supply

Supply voltage	7.5 to 45 VDC(without display) , polarity protected
----------------	---

## Input

	Type	Measurement ranges	Min.meas. Ranges
Resistance thermometer(RTD)	Pt100	-200°C to 850°C(-328°F to 1562°F)	10K
	Pt500	▲ -200°C to 250°C(-328°F to 482°F)	10K
	Pt1000	▲ -200°C to 250°C(-328°F to 482°F)	10K
	Cu50	-50°C to 150°C (-58°F to 302°F)	10K
	Cu100	-50°C to 150°C (-58°F to 302°F)	10K
	*Ni100	-60°C to 180°C (-76°F to 356°F)	10K
	*Ni500	▲ -60°C to 180°C (-76°F to 356°F)	10K
Resistance transmitter	Resistance(Ω)	0 to 400 Ω	10 Ω
		▲ 0 to 2000 Ω	20 Ω
*α=5000ppm/K or 6180ppm/K Connection type: 2-, 3- or 4-wire connection Sensor current: 0.5 mA			
Thermocouples(TC)	B(PtRh30-PtRh6)	0 to 1820°C( 32 to 3308°F)	500K
	E(NiCr-CuNi)	-270 to 1000°C(-454 to 1832°F)	50K
	J(Fe-CuNi)	-210 to 1200°C(-346 to 2192°F)	50K
	K(NiCr-Ni)	-270 to 1372°C(-454 to 2501°F)	50K
	N(NiCrSi-NiSi)	-270 to 1300°C(-454 to 2372°F)	50K
	R(PtRh13-Pt)	-50 to 1768°C(-58 to 3214.4°F)	500K
	S(PtRh10-Pt)	-50 to 1768°C(-58 to 3214.4°F)	500K
Voltage transmitters(mV)	Millivolt transmitter(mV)	-10 to 75mV	5mV
		▲ -100 to 100mV	5mV
		▲ -100 to 500mV	6mV
		▲ -100 to 2000mV	20mV

▲ on request

## Output

Output signal	4 to 20 mA
Signal on alarm	Underranging Linear drop to 3.8 mA
	OVERRANGING linear rise to 20.5 mA
	Sensor break; sensor open-circuit 3.6 mA
Load	max.(V <sub>power supply</sub> -7.5 V)/0.022 A
Linearisation/transmission behaviour	Temperature linear, resistance linear, voltage linear

## Installation conditions

Installation instructions	<ul style="list-style-type: none"> <li>• Installation angle: no limit</li> <li>• Installation area: Connection head accord. To DIN 43 729 Form B; TAF 10 field housing</li> </ul>
---------------------------	---

## Performance characteristics

Response time	1 s		
Reference operating conditions	Calibration temperature: 23 <sup>±</sup> (73.4 <sup>±</sup> )5K		
Long term stability	≤0.05%/year		
Switch on delay	≤5s		
Influence of ambient	Negligible		
Load influence	Negligible		
Power supply influence	Negligible		
Self stability configuration	0 to 2%		
Filter configuring	0 to 160 μ A		
Resolution	0.3 μ A		
Maximum measured error		Type	Measurement accuracy
	Resistance thermometer RTD	Pt100, Ni100 Pt500, Ni500 Pt1000, Ni1000 Cu50 Cu100	0.2K or 0.08% 0.5K or 0.20% 0.3K or 0.12% 0.2K or 0.08% 0.3K or 0.12%
	Thermocouple TC	K, J, T, E N S, B, R	typ.0.5K or 0.08% typ.1.0K or 0.08% typ.2.0K or 0.08%
Maximum measured error		Type	Measurement accuracy
	Resistance transmitter(Ω)	0 to 400 Ω 0 to 2000 Ω	±0.1 Ω or 0.08% ±1.5 Ω or 0.12%
	Voltage transmitters(mV)	-10 to 75mV -100 to 100mV -100 to 500mV -100 to 2000mV	±20 μ V or 0.08% ±20 μ V or 0.08% ±30 μ V or 0.08% ±50 μ V or 0.08%


## Environment conditions

Ambient temperature limits	-40 to 85°C (-40°F to 185°F)
Storage temperature	-40 to 100°C (-40°F to 212°F)
Condensation	Allowable
Degree of protection	IP 00, IP66(installed)
Shock and vibration resistance	4g/2 to 150 Hz as per IEC 60 068-26
Electromagnetic compatibility(EMC)	Interference immunity and interference emission according to GB/T17626.2-1998), compliance with IEC 61000-4-3:1995.
Explosion	Intrinsically safe: Exia II Ct4


### Others

Dimensions	Dia. 44 mmX24 mm(TMT192B) Dia. 44 mmX22.5mm(TMT192/TMT192A)
Weight	Approx. 34g
Material	Housing: PC Potting: epoxy


### Electrical connections

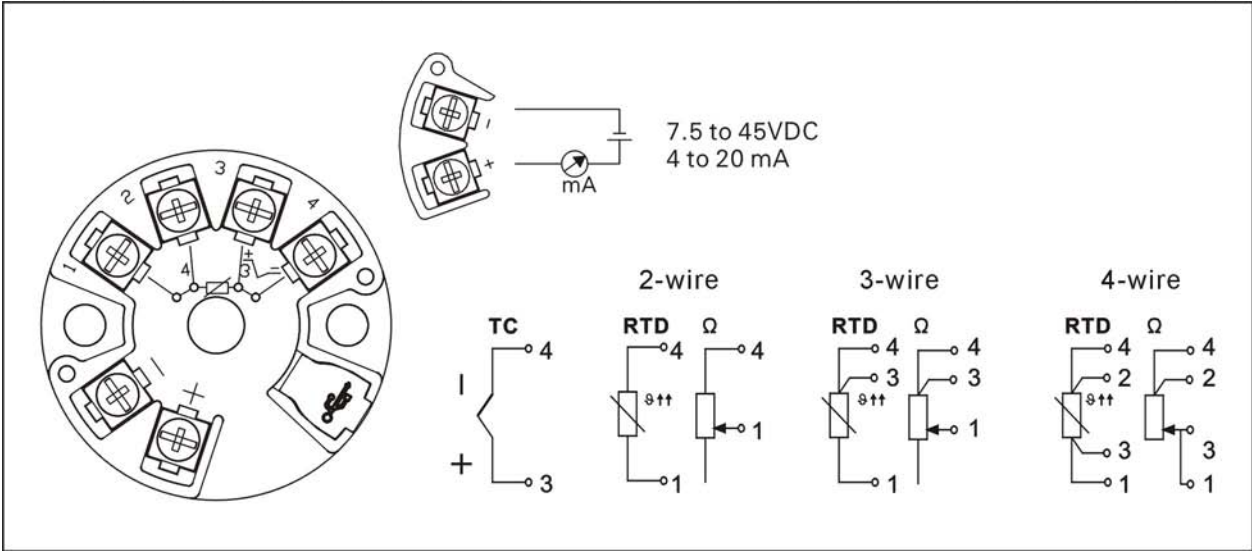

### Dimensions

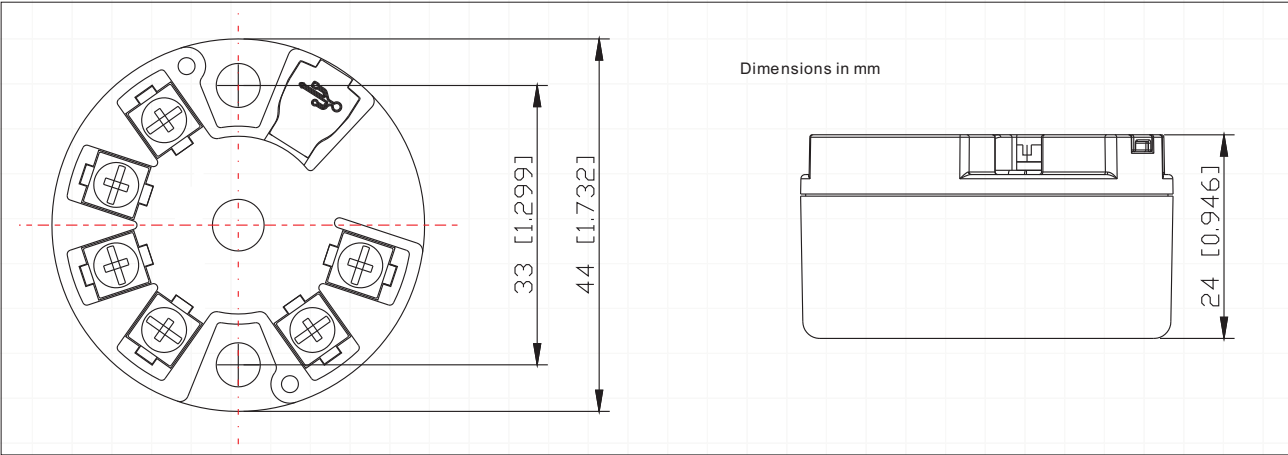

### How to programme

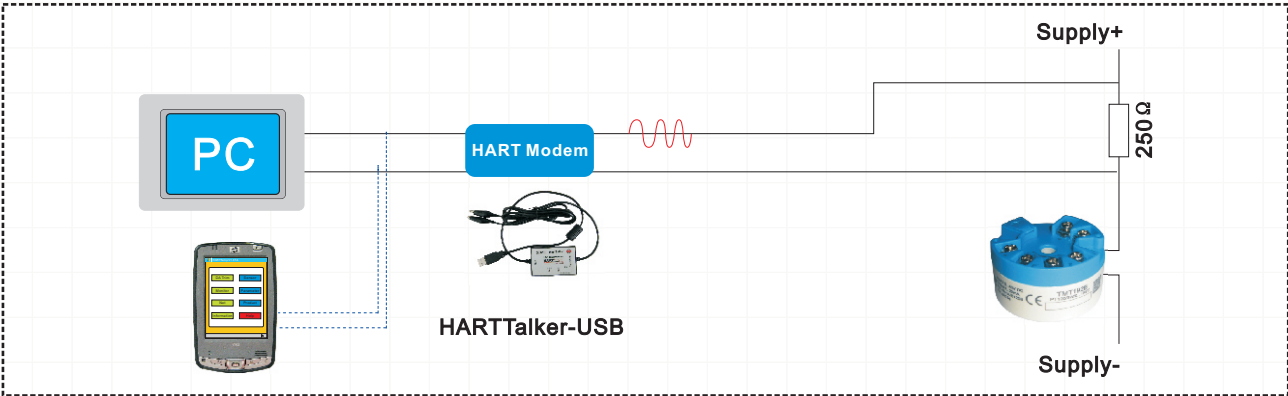

## Product ordering code

TMT192 series ---- Ordering code			
<b>Model</b>			
A			Advanced, 2009 version
B			Advanced, 2010 version
<b>Certification</b>			
A			Version for non hazardous areas
B			NEPSI Ex ia CT4
<b>Configuration transmitter connection</b>			
A			Standard factory configuration 3-wire
1			Configuration connection TC
2			Configuration connection RTD(2-wire)
3			Configuration connection RTD(3-wire)
4			Configuration connection RTD(4-wire)
<b>Configuration temperature sensor</b>			
A			Standard factory configuration Pt100
1			Pt100 -200°C to 850°C (-328°F to 1562°F)
2			Pt500 -200°C to 250°C (-328°F to 482°F)
3			Pt500 -200°C to 250°C (-328°F to 482°F)
4			Pt1000 -200°C to 250°C (-328°F to 482°F)
5			Cu50 -50°C to 150°C (-58°F to 302°F)
6			Cu100 -50°C to 150°C (-58°F to 302°F)
7			Ni100 -60°C to 180°C (-76°F to 356°F)
8			Ni500 -60°C to 180°C (-76°F to 356°F)
B			Type B 0 to 1820°C (-32 to 3308°F)
E			Type E -270 to 1000°C (-454 to 1832°F)
J			Type J -210 to 1200°C (-346 to 2192°F)
K			Type K -270 to 1372°C (-454 to 2501°F)
N			Type N -270 to 1300°C (-454 to 2372°F)
R			Type R -50 to 1768°C (-58 to 3214.4°F)
S			Type S -50 to 1768°C (-58 to 3214.4°F)
T			Type T -270 to 400°C (-454 to 752°F)
<b>Configuration</b>			
A			Standard factory configuration ( Pt100/3-wire/0 to 100°C )
B			Customised measurement range
C			Customised expanded configuration for TC ( see questionnaire )
D			Customised expanded configuration for RTD ( see questionnaire )
TMT192			Order code ( complete )